



DC Cooled Outdoor Battery Cabinets 650 Ah or 1200 Ah Battery Bank , Pre-Factory equipped with 19" or 21" sub racks for rectifiers, DC/AC Panel, fuses , main breaker, alarms, adjustable shelf's:

Standard modules normally 650 Ah or 1200 Ah sized 1870 mm, Width 660 mm, Depth 660 mm
 Inside in top e.g. 19" or 21" Sub-racks, AC/DC Distribution panel , rectifier module, alarms, main breaker, fuses adjustable battery shelf's to carry a weight of 300 kg each
 Walls are double steel with insulation
 LED lights installed in top inside the cabinet
 Cable routing enough with space on each side of the shelf's and racks to route cables
 AC Distribution: Breaker Capacity is 125 Amp 3 Pole Nader preferred & SPD of 200A
 Door sensor with dry contact and cable and alarm
 DC Air-conditioner normally pre-installed in the front door for easy access and sufficient functional space to internal equipment
 Cable holes at the bottom of Cabinet with different sizes i.e. 2x2", 2x1.5", 2x1" diameter
 Installation accessories kit e.g. L-Keys, cage nuts/bolts etc.
 Emergency cooling fans provision in case of DC Air-con fault
 Number of adjustable battery shelves depends on electronic equipment installed
 Spring lock for anti-theft purposes
 Self-holding/locking safety mechanism to hold the door open once open for work and testing
 Condensate water alarm logging sensor at the bottom of cabinet
 Grounding copper bar at the front bottom of cabinet
 DC light with automatic control switch mounted inside the cabinet
 High & Low temperature Alarm system



1200 Ah Battery Cabinet



600 Ah Battery Cabinet

HIGH QUALITY COMPONENTS BRAND



GLOBAL CERTIFICATIONS



Name	DC Cooled Outdoor Battery Cabinet
Code	DC-HUNT 3 shelf's / DC-HUNT-4 self's
Model	3 shelf's – 600Ah – 4 shelf's 1200Ah
Power	-48 V DC Nominal (-38.4VDC ~ - 57.6 VDC)
Rated current	2.1A
Battery model	W181*H225*D400mm 3set /shelf * 8=24set or W231*H181*D400mm 4set/shelf*6=24set
Heat leakage	6.9 W/K
Thermal insulation material	PU foam 30, 40 or 60 mm
Air con. Cooling capacity	300W
Working Temperature Range	-40°C ~ +65°C
Internal Airflow	1050 m³/h
Max. Noise Level	55dB(A)
IP Grade	IP55
Net Weight	55Kg
Refrigerant	R134a
Outer Dimensions	2100x920x700(mm, HxWxD)
Inner Dimensions	1730x820x590(mm, HxWxD)
CE & RoHS Compliant	YES
Surface Treatment	Outdoor type powder coating standard color, zink or aluminium

HIGH QUALITY COMPONENTS BRAND



GLOBAL CERTIFICATIONS



Cabinet Samples



Front



Back



Open door with DC Cooling


HIGH QUALITY COMPONENTS BRAND



GLOBAL CERTIFICATIONS



Factory assembled and equipped DC cooled Cabinet

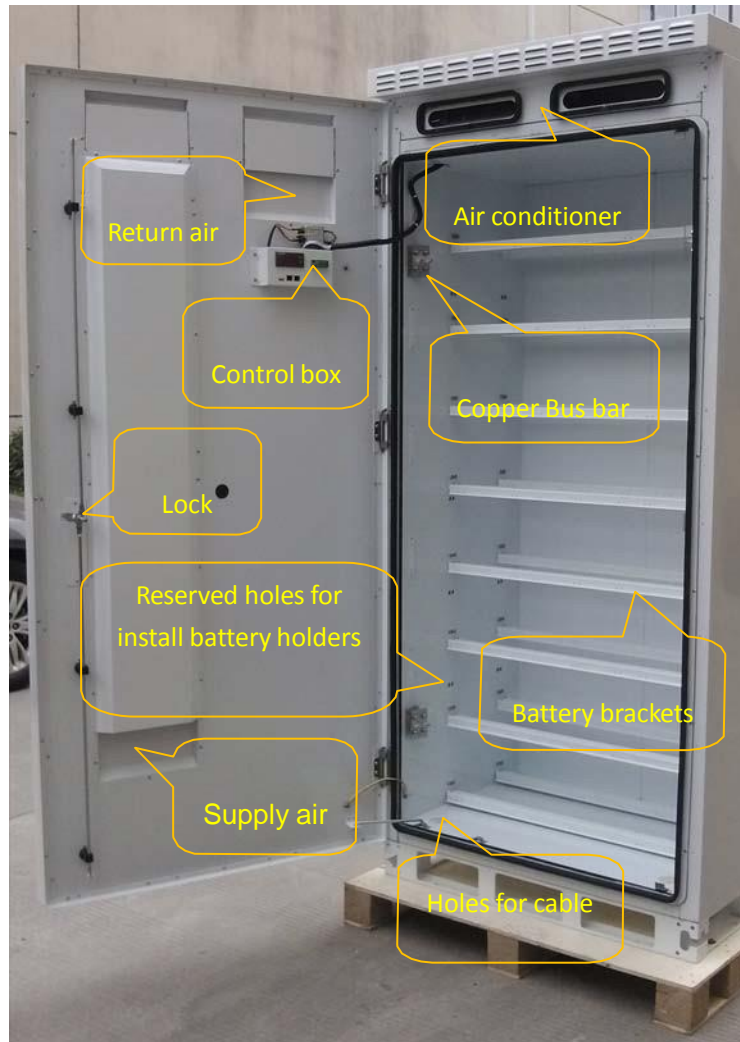

Download product sheet

More information are available to download in Adobe Acrobat's portable document format (PDF).

A-Hunter DC outdoor-cool-cab_2013
| [Download \(PDF\)](#)

HIGH QUALITY COMPONENTS BRAND



GLOBAL CERTIFICATIONS



EMEA: <http://huntertelecom.eu> - RoW: <http://huntersitesolution.com>